


JCPT0807HD / JCPT1008 / JCPT1212HD / JCPT1412HD / JCPT1612HD



Product Features

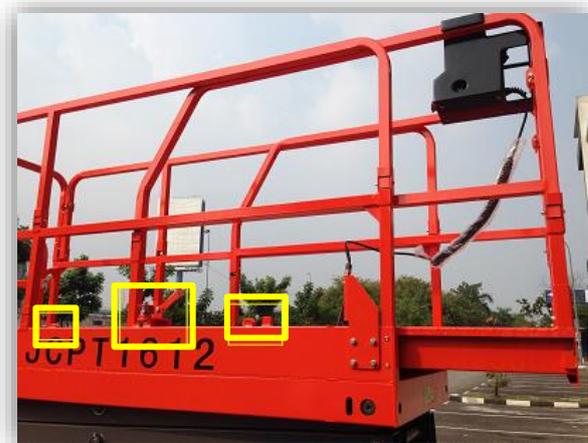

Extension Deck

Instead of the usual extension deck, we added a stopper at the middle between platform and extension deck. This allows users to have flexibility on the extension especially at narrow spaces.

Smart Clip Guardrails

The Gorly Scissor lift Guardrails are being locked with smart clips. This smart clips help user to easily fold / raise the guardrails in within 1 minutes without required any single tools.



Secure Tray Locker

A locker installed on both tray handle which provide users an option to lock both left right tray from being access by unauthorized person.



Charger Power Plug

Cable charger often damage due to improper keeping. Therefore we designed our scissor lift cable charger to roll in as shown in picture.

Bumper

An additional bumper is installed on both left and right of the scissor lift. This helps to minimize from the damages done directly to scissor lift body when operating at narrow spaces.



Emergency Button

Should there be any breakdown while platform is raised, user may simply press on the emergency button to lower down the platform. The emergency button is located at the back of the scissor lift.



Compact Maneuverability

All model have front-wheel drive and most models feature zero inside turning radius for excellent maneuverability in tight spaces. Also it is equipped with non-marking tires which prevent scuffing floors or picking up debris that could otherwise damage a floor.

Easy Handling

User friendly joystick which help users to easily operates the scissor lift. The joystick also equipped with an emergency stop button and monitor that display the balance power as well as error codes when something went wrong.



Easy Service

There is an on-board diagnostic installed. Errors code will be displayed from the monitor when something went wrong. The error code basically help operators troubleshoot on the fly and make adjustments in the field to maximize uptime.



Scheduled Maintenance

Hour meter is installed on the scissor lift to monitor total hour usage. With this, it helps users to perform its scheduled maintenance from time to time. Scheduled maintenance is necessary to assure the scissor lift is in good condition at all time.

Long Operating Hours

Our scissor lift JCPT1612 & JCPT1412 is installed with 4x12V Trojan battery. A full overnight charge on the battery could allow users to operate the lift for 8 hours without any charge in between. This would definitely increase the efficiency for users to complete their work at shorter time.



Simple System

The entire hydraulic system is being designed to be simple and easy for trouble shooting. Any malfunction parts can be easily replace.



Standard Features

- ✓ *Proportional Controls*
- ✓ *Automatic Pothole Guard System*
- ✓ *On-Board Diagnostic System*
- ✓ *Auto Brake System*
- ✓ *Tilt Protection System*
- ✓ *Emergency Platform Lowering System*
- ✓ *Emergency Stop Button*
- ✓ *Non-Marking Tires*
- ✓ *Folding Guardrails*
- ✓ *Extension Deck*

Why Choose Us?

1 *Value for money*
High quality product with value-added services offered at competitive price

2 *Technical Support*
Rest assured that all queries will be attended by professional technicians at our service center in Shah Alam, Selangor




3 *Parts availability*
It's ALL HERE; spare parts are readily available in an event of breakdown!

4 *Parts and Labour Warranty*
Up to 18 months componentry warranty!
Consult our personnel for more details.



GORLY SCISSORS LIFT

PRODUCT SPECIFICATION	GL-JCPT0607	GL-JCPT0807	GL-JCPT1008	GL-JCPT1212	GL-JCPT1412	GL-JCPT1612
MEASUREMENT						
WORKING HEIGHT MAXIMUM	6.20M	8.00M	10.00M	11.75M	13.80M	15.80M
A PLATFORM HEIGHT MAXIMUM	4.20M	6.00M	8.00M	9.75M	11.80M	13.80M
B PLATFORM HEIGHT STOWED	1.04M	1.75M	1.97M	2.00M	2.10M	2.47M
C PLATFORM LENGTH OUTSIDE	1.21M	1.68M	2.27M	2.27M	2.27M	2.27M
PLATFORM LENGTH EXTENDED	1.81M	2.58M	3.17M	3.17M	3.17M	3.17M
SLIDE-OUT PLATFORM EXTENSION DECK	0.60M	0.90M	0.90M	0.90M	0.90M	0.90M
D PLATFORM WIDTH	0.74M	0.74M	0.84M	1.10M	1.10M	1.10M
E HEIGHT-STOWED : GUARDRAIL RAISED	1.90M	2.12M	2.34M	2.46M	2.56M	2.73M
HEIGHT-STOWED : GUARDRAIL FOLDED	1.04M	1.75M	1.97M	2.00M	2.10M	2.25M
F LENGTH-STOWED	1.44M	1.90M	2.48M	2.48M	2.48M	2.48M
G WIDTH	0.76M	0.76M	0.84M	1.15M	1.15M	1.37M
H WHEELBASE	1.04M	1.38M	1.87M	1.87M	1.87M	1.87M
I GROUND CLEARANCE	0.10M	0.10M	0.10M	0.10M	0.10M	0.10M
J WITH POTHOLE GUARDS DEPLOYED	0.01M	0.01M	0.01M	0.01M	0.01M	0.01M
PRODUCTIVITY						
MAXIMUM PLATFORM OCCUPANCY	2	2	2	2	2	2 (INDOR) 1 (OUTDOOR)
LIFT CAPACITY	240KG	230KG	230KG	320KG	230KG	200KG
DROVE SPEED - STOWED	5.5KM/H	5.0KM/H	4.0KM/H	4.0KM/H	4.0KM/H	4.0KM/H
DROVE SPEED - RAISED	0.8KM/H	0.8KM/H	0.8KM/H	0.8KM/H	0.8KM/H	0.8KM/H
GRADEABILITY	25%	25%	25%	25%	25%	25%
MAXIMUM TILT	3°	3°	3°	3°	3°	3°
TURNING RADIUS (INSIDE)	0	0.51M	0.69M	0.69M	0.69M	0.69M
TURNING RADIUS (OUTSIDE)	1.25M	1.87M	2.40M	2.62M	2.62M	2.70M
RAISE / LOWER SPEED	15/24SEC	16/26SEC	28/40SEC	40/36SEC	58/40SEC	76/50SEC
NON-MARKING TIRES	305 X 114MM	305 X 114MM	381 X 127MM	381 X 127MM	381 X 127MM	381 X 127MM
POWER						
POWER SOURCE	24V/3.3KW	24V/3.3KW	24V/3.3KW	24V/3.3KW	24V/3.3KW	24V/3.3KW
BATTERY	4x6V/210AH	4x6V/210AH	4x6V/210AH	4x6V/210AH	4x12V/300AH	4x12V/300AH
WEIGHT	880KG	1450KG	2200KG	2900KG	3060KG	3200KG

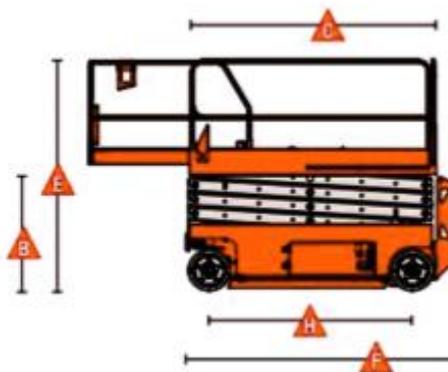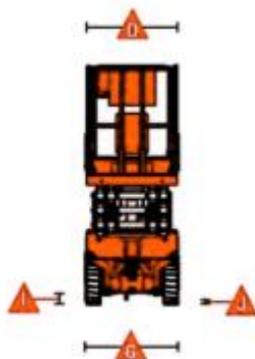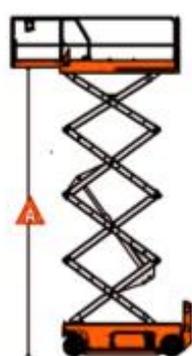

This product is available with the CE mark conforming compliances with all relevant European Machinery Directives.



GORLY SCISSORS LIFT

